

AP 240

PNEUMATIC TYRE ROLLER

EU STAGE IIIA / U.S. EPA TIER 3

APPLICATIONS

- Medium and large compaction sites
- Transport construction - motorways, airfields
- Municipal and town roads
- Industrial zones - parking areas
- Surface finishing machine



PRODUCTIVITY

High variable **compaction output control** provides simple weight adjustment according to jobsite requirements.

The isostatic front axle with oscillation ensures consistent ground contact, delivering **smooth rolling**.

ERGONOMICS

Platform and cab

Spacious and quiet, with 360° visibility from the operator station to the machine edges and surroundings.

Operator station

Ergonomically friendly and designed for comfort and safety.

SERVICEABILITY

Low downtime

Easy engine access, external test points and quick diagnostics help keep the machines working and productive.

Reduced maintenance

Service and maintenance points can be easily reached, helping the machine and the crew get back to the jobsite.

SUSTAINABILITY

ECodrop

Improved efficiency, lower fuel consumption, reduced use of fluids.

Digitalization

Enables tracking and documentation of usage, jobsite efficiency and productivity.

OPTIONAL EQUIPMENT

- CE conformity
- A/C
- Additional documentation printed
- Back-up alarm
- Ballast blocks under 2x1.4t
- Ballast blocks under 2x3.0t
- Ballast inside frame 1.0t
- Ballast inside frame 2.0t
- Ballast inside frame 4.0t
- Ballast inside frame 8.0t
- Canvas canopy ROPS mounted
- Canvas canopy selfstanding
- Certificate of origin
- Color scheme customer
- Edge cutter (no pressing wheel)
- Emulsion sprinkling system
- Engine air inlet pre-cleaner
- Fire extinguisher
- FOPS cab
- FOPS ROPS mounted
- Frame ROPS
- Frame waterproof
- Greasing tool and wheel spanner
- Chock blocks
- Maintenance kit 2000h
- Maintenance kit 1000h
- Maintenance kit 500h
- Maintenance kit 250h
- Radio FM
- Radio preparation
- Safety cover fan
- Scrapers brushes tiltable
- Scrapers cocoa tiltable
- Seat belt 3"
- Slow moving vehicle triangle
- Spare wheel Dunlop
- Spare wheel Michelin
- Spare wheel Mitas Diagonal
- Spare wheel Mitas Radial
- Sun films on cab glasses
- Telematics Preparation
- Thermal aprons
- Toolset
- Towing hinge Front
- Tyres Dunlop
- Tyres Michelin
- Tyres Mitas Radial
- Warning beacon for Cab
- Warning beacon for ROPS


STANDARD EQUIPMENT

- 2 operators places
- 4+4 diagonal Mitas tyres
- Ammann color design and decals
- Ammann Traction Control
- Battery disconnection switch
- Central inflation system "Air on Run"
- Centralized draining points
- Foldable brushes
- Front mirrors
- Horizontally adjustable driver's seat with armrests
- Hydrodynamic drive of rear axle with 3 gear power shift gearbox
- Isostatic leveling of front axles
- Non-CE machine base
- Non-waterproof frame
- Open platform with guard rails
- Pressure water sprinkling with interval switch, 3 stage filtration
- Road lights (front lights, rearlights, turning signals, brake lights)
- Standard hydraulic oil

AMMANN

AP 240

StIIIA / T3

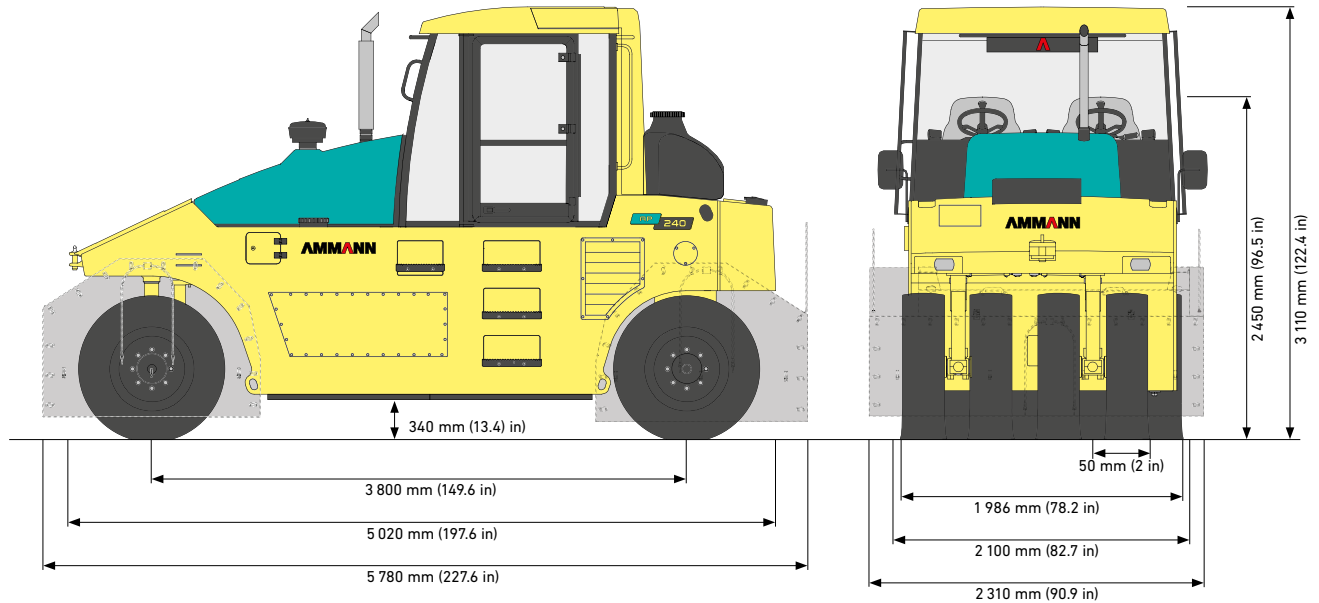

WEIGHT & OPERATING CHARACTERISTICS

OPERATING WEIGHT	9 690 kg (21363 lb)
OPERATING WEIGHT MAX.	24 000 kg (52911 lb)
MAX. WORKING SPEED	19 km/h (11.8 mph)
GRADEABILITY	25%
TURNING RADIUS (INNER-LEFT)	6 180 mm (243.3 in)
TURNING RADIUS (INNER-RIGHT)	6 065 mm (238.8 in)
NUMBER OF WHEELS	4+4 pcs

ENGINE

MANUFACTURER	Cummins
ENGINE TYPE	QSB 3.3-C99
POWER OUTPUT ISO 3046-1	74 kW / 99HP
ENGINE SPEED	2200 rpm
EMISSION STAGE	EU Stage IIIA / U.S. EPA Tier 3

MISCELLANEOUS

BRAKES OPERATING	Drum
BRAKES PARKING	Mechanical disc
BRAKES EMERGENCY	Mechanical disc
TYPE OF DRIVE	Hydrodynamic
NUMBER OF DRIVEN WHEELS	4
FUEL TANK CAPACITY	250 l (66 gal)
WATER TANK CAPACITY	460 l (121.5 gal)
TYPE OF WATERING	Pressure
STEERING ANGLE	±32°
OSCILLATION ANGLE	±3°
BATTERY VOLTAGE	12V
BATTERY CAPACITY	135 Ah
SIZE OF TYRES	11x20"

MAXIMUM RECOMMENDED COMPACTED LIFT THICKNESS AT OPTIMAL WORKING CONDITIONS

ROCKFILL	–
SAND / GRAVEL	250 mm (9.8 in)
MIXED SOILS	200 mm (7.9 in)
SILT	200 mm (7.9 in)
CLAY	150 mm (5.9 in)
STABILISATION	200 mm (7.9 in)
ASPHALT	120 mm (4.7 in)

AP 240

For additional product information and services please visit: www.ammann.com
Materials and specification data are subject to change without notice.
MSS-1183-04-EN | © Ammann Group

AMMANN