

ARX 110.2-2

ARTICULATED TANDEM ROLLER

EU STAGE IIIA / U.S. EPA TIER 3

APPLICATIONS

- Small and medium jobsites
- Transportation construction roads
- Municipal and local roads
- Housing developments
- Industrial zone roads and parking areas
- City centers



PRODUCTIVITY

Precise compaction performance

Two-stage vibratory system enables adjustment to a particular jobsite.

Smooth rolling

Advanced drive system prevents sudden starts and stops during machine operation.

ERGONOMICS

Platform and cab

Spacious and quiet, with 360° visibility.

Operator station

Provides high comfort and safety.

SERVICEABILITY

Minimized downtime

Heavy duty components and robust construction.

Reduced maintenance

Extended service intervals; easy-to-reach maintenance points.

SUSTAINABILITY

ECODrop

Improved efficiency, reduced use of fluids

Digitalization

Advanced monitoring and measuring systems.

OPTIONAL EQUIPMENT

- Additional documentation printed
- Additional mirrors rear
- Ammann Documentation Syst. ADS
- Ammann Documentation Syst. ADS RTK
- Ammann Traction Control - ATC
- AmmannCare Silver
- AmmannCare Gold
- AmmannCare Platinum
- AmmannCare Diamond
- Back-up alarm
- Back-up alarm adaptive
- Certificate of origin
- Color scheme customer
- Compaction measuring system ACE
- Container shipment preparation
- Edge cutter 45° (front right)
- Frame steps foldable rear
- Hydraulic oil biodegradable
- Infrared thermometer
- Maintenance Kit 2000h
- Maintenance Kit 1000h
- Maintenance Kit 500h
- Platform with hard canopy foldable
- Platform with ROPS cabin
- Platform with ROPS cabin A/C
- Platform with ROPS/FOPS
- Radio FM
- Rear view camera
- Road lights incl. turn signals LED
- Safety cover fan
- Seat belt 3"
- Slow moving vehicle triangle
- Sprinkling system second antifreeze pump
- Sun films on cab glasses
- Sun visor
- Telematics Preparation
- Telematics ServiceLink Plus
- Telematics ServiceLink Pro
- Toolset
- Warning beacon LED
- Warning beacon LED
- Warning beacon LED for canopy


STANDARD EQUIPMENT

- 2 amplitudes / 2 frequencies
- Adjustable steering column
- Ammann color design and decals
- Anti-vandal dashboard cover
- Battery disconnection switch
- Double drum version: Front and rear drive and vibration
- ECODrop
- Multi-functional display for machine control and overview
- On-board diagnostics
- Operator's station with one drive lever (RH)
- Platform with rails
- Pressure water sprinkling with interval switch, 2 stage filtration and 1 pump
- Standard hydraulic oil
- Swiveling (60°) and horizontally adjustable driver's seat with armrests
- Telematics Readiness
- Test ports on hydro-components
- Tilttable scrapers
- Two non-split drums
- Working lights

AMMANN

ARX 110.2-2

StIIIA / T3

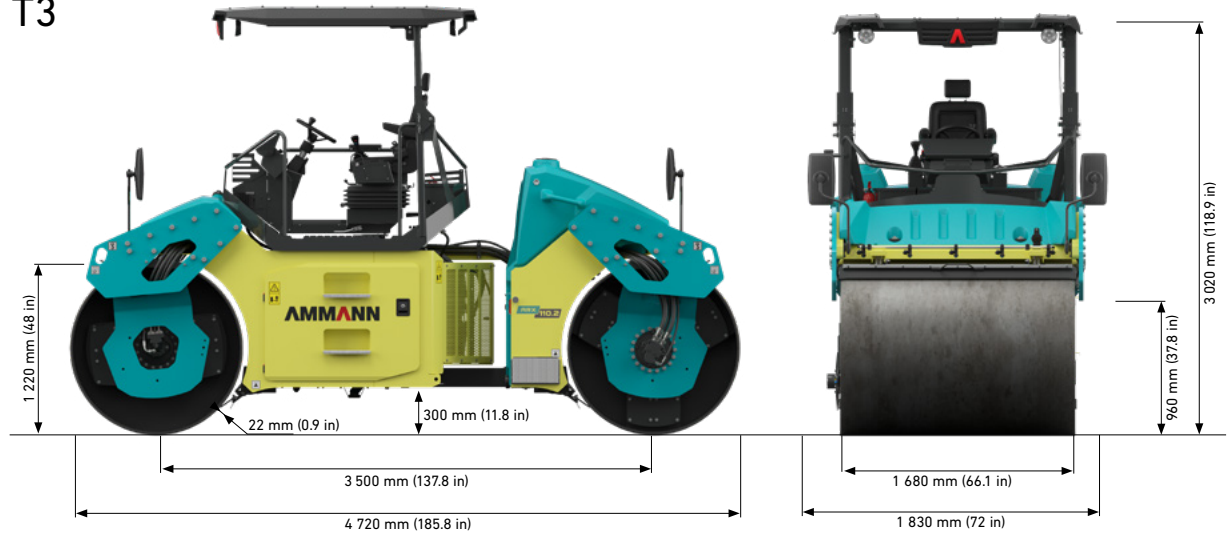

WEIGHT & OPERATING CHARACTERISTICS

OPERATING WEIGHT (OPEN PLATFORM)	10 020 kg (22.090 lb)
OPERATING WEIGHT MAX.	10 910 kg (24.052 lb)
STATIC LINEAR LOAD AVG.	30,2 kg/cm (169.1 lb/in)
MAX. SPEED	11 km/h (6.8 MPH)
GRADEABILITY WITHOUT VIBRATION	35%
GRADEABILITY WITH VIBRATION	30%
TURNING RADIUS (INNER)	5 650 mm (222.4 in)

ENGINE

MANUFACTURER	Cummins
ENGINE TYPE	QSF4.5
ENGINE SPEED	2200
POWER OUTPUT	90 kW / 120HP
EMISSION STAGE	EU StagellIA / U.S. EPA Tier 3
EXHAUST GAS AFTER-TREATMENT	N/A

COMPACTION FORCES

FREQUENCY I	43 Hz (2 580 vpm)
FREQUENCY II	55 Hz (3 300 vpm)
CENTRIFUGAL FORCE I	115 kN (25 853 lbf)
CENTRIFUGAL FORCE II	86 kN (19 334 lbf)
AMPLITUDE I	0,8 mm (0.031 in)
AMPLITUDE II	0,33 mm (0.013 in)

MISCELLANEOUS

BRAKES OPERATING	Hydrostatic
BRAKES PARKING	Multiple-disc spring brake
BRAKES EMERGENCY	Multiple-disc spring brake
FUEL TANK CAPACITY	190 l (50.2 gal)
WATER TANK CAPACITY	800 l (211.3 gal)
TYPE OF WATTERING	Pressure
HYDRAULIC OIL CAPACITY	70 l (18.5 gal)
STEERING ANGLE	±30°
OSCILLATION ANGLE	±6°
BATTERY VOLTAGE	12V
BATTERY CAPACITY	2x90 Ah

MAXIMUM RECOMMENDED COMPACTED LIFT THICKNESS AT OPTIMAL WORKING CONDITIONS

ROCKFILL	–
SAND / GRAVEL	420 mm (16.5 in)
MIXED SOILS	320 mm (12.6 in)
SILT	–
CLAY	–
STABILISATION	220 mm (8.7 in)
ASPHALT	150 mm (5.9 in)

ARX 110.2-2

For additional product information and services please visit: www.ammann.com

Materials and specification data are subject to change without notice.

MSS-3551-00-EN | © Ammann Group

AMMANN