

ARX 110-2

ARTICULATED TANDEM ROLLER

EU STAGE V / U.S. EPA TIER 4 FINAL

APPLICATIONS

- Medium and large compaction sites
- Transport construction
- Municipal and town roads
- Housing developments
- Industrial zones
- City centers



PRODUCTIVITY

Variable compaction output

Two-stage vibratory system enables adjustment to the particular jobsite.

Smooth rolling

Advanced drive system prevents sudden starts and stops during machine operation.

ERGONOMICS

Platform and cab

Spacious and quiet, with 360° visibility.

Operator station

Provides high comfort and safety.

SERVICEABILITY

Minimized downtime

Heavy duty components and robust construction.

Reduced maintenance

Extended service intervals; easy-to-reach maintenance points.

SUSTAINABILITY

ECOdrops

Improved efficiency, reduced use of fluids.

Advanced technologies

Including monitoring and measuring systems, enhance efficiency, productivity, and enable precise documentation.

OPTIONAL EQUIPMENT

- A/C
- A/C without cooling medium
- Additional documentation printed
- Additional lights 360° LED
- Ammann Documentation Syst. ADS
- Ammann Documentation Syst. ADS RTK
- AmmannCare Silver
- AmmannCare Gold
- AmmannCare Platinum
- AmmannCare Diamond
- Ammann Traction Control - ATC
- Back-up alarm
- Back-up alarm adaptive
- Cab ROPS
- Certificate of origin
- Color scheme customer
- Compaction measuring system ACE^{force}
- Container shipment preparation
- Cooling box
- Crab mode (Offset)
- Drums double unsplit HF
- Edge cutter 45° (diagonal)
- Edge cutter 45° (front right)
- Edge cutter 45° (front right/front left)
- Engine automatic stop
- Fire extinguisher
- GPS Q-Compaction ACE
- GPS Q-Compaction Preparation ACE
- Homologation Italy (plate only)
- Hydraulic oil biodegradable
- Chip spreader linear
- Infrared thermometer
- Maintenance Kit 1000h
- Maintenance Kit 2000h
- Maintenance Kit 500h
- Oscillating drum - (double drum unsplit HF)
- Oscillating drum - (double drum unsplit)
- Radio DAB
- Rear view camera
- Registration plate holder incl. light
- Road lights incl. turn signals LED
- Roll Angle Warning (RAW)
- Seat belt 3"
- Slow moving vehicle triangle
- Sprinkling system second antifreeze pump
- Sun films on cab glasses
- Sun visor
- Telematics Preparation
- Telematics ServiceLink Plus
- Telematics ServiceLink Pro
- Toolset
- Transport remote control
- Warning beacon green LED
- Warning beacon LED
- Water tank filling from ground


STANDARD EQUIPMENT

- 2 amplitudes / Multiple frequencies
- Ammann color design and decals
- Additional mirrors rear
- Battery disconnection switch
- CE conformity
- Double drum version: Front and rear drive and vibration
- ECDrop
- Electronic drive lever with intelligent functions
- FTS (Finger-Tip-Steering)
- Lockable articulation joint with Oscillation
- Multi-functional 10inch touchable display for machine control and overview
- On-board diagnostics
- Open platform with roof and ROPS
- Operator's station with one drive lever (RH)
- Pressure water sprinkling with interval switch, 3 stage filtration and 1 pump
- Slideable, 270° rotatable and horizontally adjustable driver's seat with armrests
- Standard hydraulic oil
- Tilttable scrapers
- Test ports on hydro-components
- Two non-split drums
- Telematics Readiness
- Working lights Cab LED

AMMANN

ARX 110-2

StV / T4f

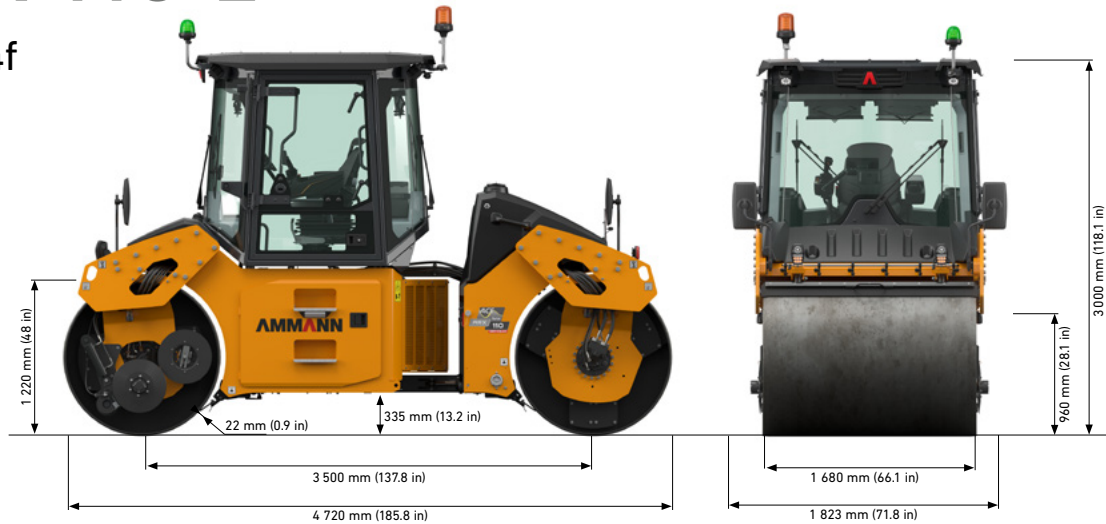

WEIGHT & OPERATING CHARACTERISTICS

OPERATING WEIGHT	10 420 kg (22,972 lb)
OPERATING WEIGHT MAX.	11 820 kg (26,059 lb)
STATIC LINEAR LOAD AVG.	31,3 kg/cm (175.3 lb/in)
MAX. SPEED	11,7 km/h (7.3 MPH)
GRADEABILITY WITHOUT VIBRATION	30%
GRADEABILITY WITH VIBRATION	30%
TURNING RADIUS (INNER)	5 470 mm (215.4 in)
DRUM OFFSET	170 mm (6.7 in)

ENGINE

MANUFACTURER	Perkins
ENGINE TYPE	904J
ENGINE SPEED	2 400 rpm
POWER OUTPUT ISO 14396	90 kW / 121HP
EMISSION STAGE	EU Stage V / U.S. EPA Tier 4f
EXHAUST GAS AFTER-TREATMENT	EGR+DOC+DPF+SCR

COMPACTION FORCES

	ARX 110-2	ARX 110-2 HF
FREQUENCY I	37–42 Hz (2,220–2,520 vpm)	36–46 Hz (2,160–2,760 vpm)
FREQUENCY II	44–54 Hz (2,640–3,240 vpm)	57–67 Hz (3,420–4,020 vpm)
CENTRIFUGAL FORCE I	93–120 kN (20,907–26,977 lbf)	68–111 kN (15,287–24,954 lbf)
CENTRIFUGAL FORCE II	60–91 kN (13,489–20,458 lbf)	64–88 kN (14,388–19,783 lbf)
AMPLITUDE I	0,83 mm (0.033 in)	0,64 mm (0.025 in)
AMPLITUDE II	0,38 mm (0.015 in)	0,24 mm (0.009 in)
OSCILLATION FREQUENCY	40 Hz (2,400 vpm)	
OSCILLATION AMPLITUDE	1,3 mm (0.051 in)	
OSCILLATION FORCE	77 kN (17,310 lbf)	

MISCELLANEOUS

BRAKES OPERATING	Hydrostatic
BRAKES PARKING	Multiple-disc spring brake
BRAKES EMERGENCY	Multiple-disc spring brake
FUEL TANK CAPACITY	200 l (52.8 gal)
DEF TANK CAPACITY	19 l (5 gal)
WATER TANK CAPACITY	810 l (214 gal)
TYPE OF WATERING	Pressure
HYDRAULIC OIL CAPACITY	80 l (21.1 gal)
STEERING ANGLE	±31°
OSCILLATION ANGLE	±6°
BATTERY VOLTAGE	12V
BATTERY CAPACITY	145 Ah

MAXIMUM RECOMMENDED COMPACTED LIFT THICKNESS AT OPTIMAL WORKING CONDITIONS

ROCKFILL	–
SAND / GRAVEL	420 mm (16.5 in)
MIXED SOILS	320 mm (12.6 in)
SILT	–
CLAY	–
STABILISATION	220 mm (8.7 in)
ASPHALT	150 mm (5.9 in)

ARX 110-2

For additional product information and services please visit: www.ammann.com
Materials and specification data are subject to change without notice.

MSS-3301-01-EN-US | © Ammann Group

AMMANN