

ARS 30

SINGLE DRUM ROLLER

EU STAGE V / U.S. EPA TIER 4 FINAL

APPLICATIONS

- Confined work spaces
- Landscaping projects
- Forest, dirt local roads
- Walking / bicycle paths
- Pipeline construction
- Housing developments



PRODUCTIVITY

No-rear-axle

Provides low centre of gravity and high versatility.

Compaction performance

Two frequency setting system, high compaction output.

ERGONOMICS

Platform and cab

Spacious and quiet, with 360° visibility.

Operator station

High comfort and safety.

SERVICEABILITY

Reduced downtime

Heavy-duty components and robust construction.

Reduced maintenance

Extended service intervals; easy-to-reach maintenance points.

SUSTAINABILITY

ECOdrops

Improved efficiency, reduced use of fluids.

Digitalization

Advanced monitoring and measuring systems.

OPTIONAL EQUIPMENT

- A/C
- A/C without cooling medium
- Additional documentation printed
- Additional lights 360° LED
- AmmannCare Diamond
- AmmannCare Platinum
- AmmannCare Gold
- AmmannCare Silver
- Ammann Documentation Syst. ADS
- Ammann Documentation Syst. ADS RTK
- Back-up alarm
- Back-up alarm adaptive
- Cab ROPS
- Certificate of origin
- Color scheme customer
- Compaction measuring system ACE^{force}
- Dozer blade incl. transpot lock
- Drum PD - including scrapers
- Engine air inlet pre-cleaner
- Engine pre-heating
- Fire extinguisher
- Fuel tank lock
- Homologation Italy (plate only)
- Hydraulic oil biodegradable
- Padfoot Shell Kit - including scrapers
- Radio DAB
- Radio preparation
- Rear windscreen
- Registration plate holder incl. light
- Road lights incl. turn signals
- Safety screen
- Scrapers vulcan for smooth drum
- Seat belt 3"
- Seat options armrest
- Maintenance Kit 1000h
- Maintenance Kit 2000h
- Maintenance Kit 500h
- Slow moving vehicle triangle
- Smooth shell kit incl. scrapers
- Sun visor
- Telematics Servicelink Plus
- Telematik Servicelink Pro
- Telematics preparation
- Tool box
- Toolset
- Tractor tyres wide 12.5"
- Tyre ballast -25°C
- Warning beacon LED
- Warning beacon LED green


STANDARD EQUIPMENT

- Twin-Lock system
- Open platform with ROPS
- Smooth drum
- Steel scrapers
- ECDrop
- 1 amplitude / 2 frequencies
- Operator's station with one drive lever (RH)
- Multi-functional display for machine control and overview
- 12V outlet
- Battery disconnection switch
- Working lights (front / rear) - LED
- Standard hydraulic oil
- Testports on hydrocomponents
- Manual hood opening
- Telematics Ready
- Ammann color design and decals
- Centralized draining points
- On-board diagnostics
- CE conformity
- Drive HX
- Tractor tyres

AMMANN

ARS 30

StV / T4f

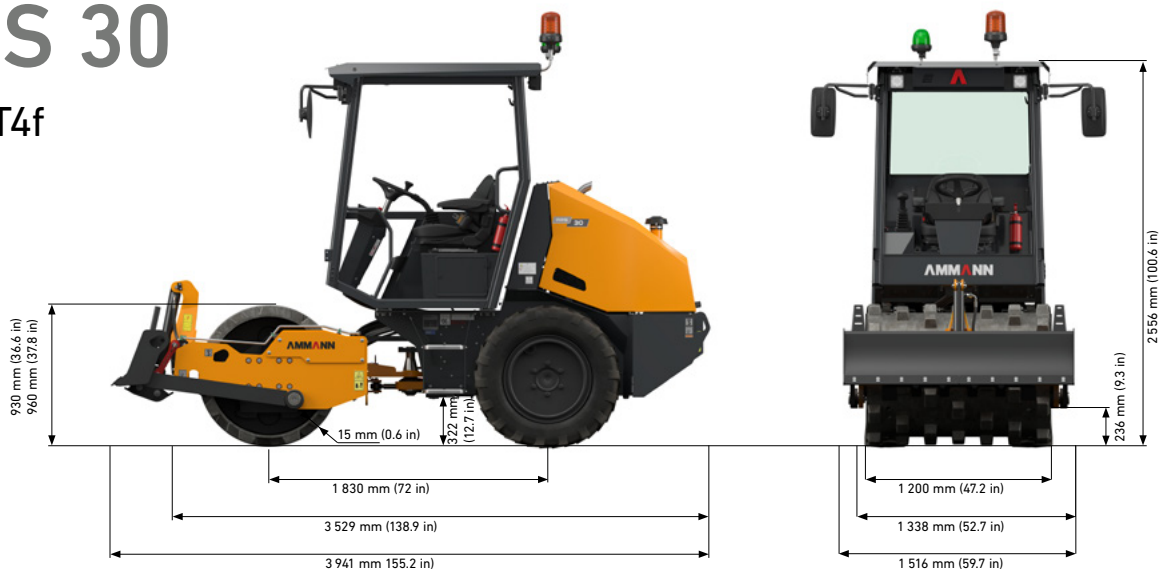

WEIGHT & DRIVING CHARACTERISTIC

		PD
OPERATING WEIGHT CAB	3 580 kg (7,893 lb)	3 590 kg (7,915 lb)
OPERATING WEIGHT CAB MAX.	4 020 kg (8,863 lb)	4 460 kg (9,833 lb)
STATIC LINEAR LOAD	13,8 kg/cm (77.3 lb/in)	–
NUMBER OF PADS	–	63 pcs
PAD CONTACT SURFACE	–	75 cm² (11.6 sq in)
PAD HEIGHT	–	60 mm (2.4 in)
MAX. WORKING SPEED	9.5 km/h (5.9 MPH)	9.5 km/h (5.9 MPH)
MAX. TRANSPORT SPEED	12 km/h (7.5 MPH)	12 km/h (7.5 MPH)
GRADEABILITY WITHOUT VIBRATION	40%	40%
GRADEABILITY WITH VIBRATION	30%	30%
TURNING RADIUS (INNER)	2 800 mm (110.2 in)	2 800 mm (110.2 in)

COMPACTION FORCES

		PD
FREQUENCY I	29 Hz (1740 vpm)	29 Hz (1740 vpm)
FREQUENCY II	38 Hz (2280 vpm)	38 Hz (2280 vpm)
CENTRIFUGAL FORCE I	37 kN (8318 lbf)	37 kN (8318 lbf)
CENTRIFUGAL FORCE II	68 kN (15,287 lbf)	68 kN (15,287 lbf)
AMPLITUDE I	1,6 mm (0.06 in)	1,5 mm (0.06 in)

MAXIMUM RECOMMENDED COMPACTED LIFT THICKNESS AT OPTIMAL WORKING CONDITIONS

		PD
ROCKFILL	–	–
SAND / GRAVEL	* 300 mm (12 in)	–
MIXED SOILS	* 250 mm (10 in)	* 250 mm (10 in)
SILT	150 mm (6 in)	* 150 mm (6 in)
CLAY	–	* 100 mm (4 in)

* Recommended drum type

MISCELLANEOUS

BRAKES OPERATING	Hydrostatic
BRAKES PARKING	Multiple-disc spring brake
BRAKES EMERGENCY	Multiple-disc spring brake
FUEL TANK CAPACITY	98 l (25.9 gal)
HYDRAULIC OIL CAPACITY	45 l (11.9 gal)
STEERING ANGLE	±30°
OSCILLATION ANGLE	±10°
BATTERY VOLTAGE	12V
BATTERY CAPACITY	90 Ah

ENGINE

MANUFACTURER	Kubota
ENGINE TYPE	V2403-CR-T
POWER OUTPUT SAE J1995	43,2 kW (58 HP)
ENGINE SPEED	2400 rpm
EXHAUST GAS AFTER-TREATMENT	EGR+DOC+DPF
EMISSION STAGE	EU Stage V / U.S. EPA Tier 4 Final

ARS 30

For additional product information and services please visit: www.ammann.com
Materials and specification data are subject to change without notice.

MSS-3019-03-EN-US | © Ammann Group

AMMANN